

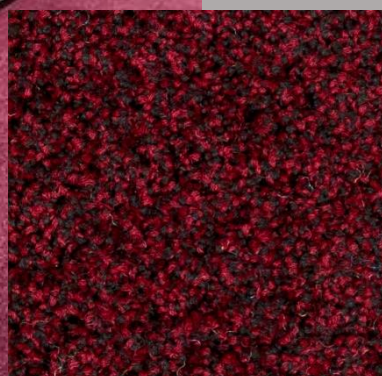
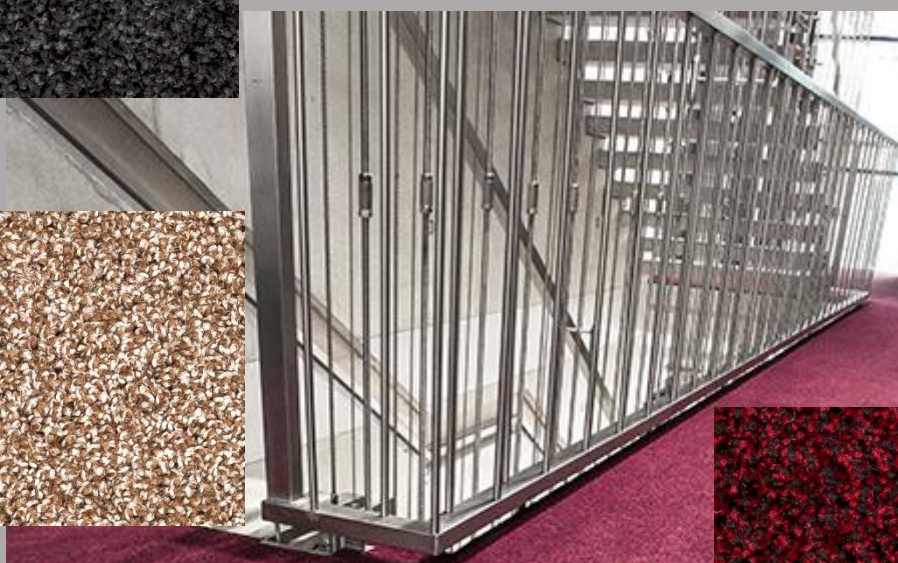


MULTICONTRACT

Douglas plaatvaip

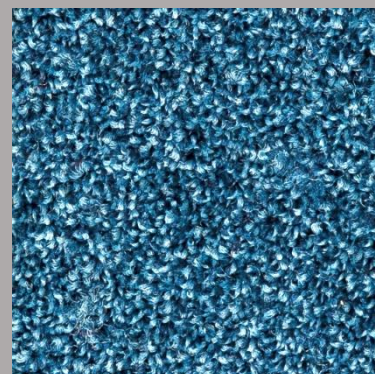

Product definition		: tufted frise
Gauge		: 1/10"
No. of tufts	ISO 1763	: ± 187 200/m ²
Pile fibre		: 100% polyamide 6 solution dyed
Pile weight		: 1010 g/m ² ± 5%
Pile height	ISO 1766	: 5,1 mm ± 5%
Primary backing		: PA/PES non-woven - Colback
Tile backing		: Polyflex
Total thickness	ISO 1765	: 8,8 mm ± 7,5%
Total weight		: 4 600 g/m ² ± 7,5%
Tile size		: 50 x 50 cm / 100 x 25 cm / 100 x 50 cm 100 x 100 cm / 100 x 200 cm

PERFORMANCE

Use classification		: Class 32
Castor chair test	EN 985	: A, continues use
Abrasion	EN 1963	: pass
Vettermann test	ISO TR 10361 / EN 1471	: pass
Thermal isolation	ISO 8302	: 0,088 m ² K/W
Dimensional stability	EN 986	: pass

ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: -0,1 kV
Horizontal electrical resistance	ISO CD 10965	: 8x10 ⁹ Ω
Vertical electrical resistance	ISO CD 10965	: 4x10 ⁹ Ω
Static loading		: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2 EN ISO 9239-1	: Bfl - s1
Hot metal nut test	BS 4790	: Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: 7.0
Rubbing, dry	ISO 105 X12	: 4.5
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.5
Water	ISO 105 E01	: 5.0
Water stains	TNO W 6024	: 5.0

